

BB - 2590/QL089M



PERFORMANCE

- Ultra High Energy Density
- 17.8Ah 12V
- 8.9Ah 24V
- Low temperature performance (12Ah at -45°C)
- High rate capability (32A pulse discharge)

MAIN APPLICATIONS

- Military
- APU

KEY FEATURES

- Ultra High Energy Density
- Non - toxic
- Light weight
- Bullet Tested-Safety

SPECIFICATIONS


ELECTRICAL CHARACTERISTICS

Nominal Capacity	17.8Ah/8.9Ah
Nominal Voltage	12V/24V
Operating Discharge Temperature	-20°C to 60°C

PHYSICAL CHARACTERISTICS

Thickness	127 mm
Height	62 mm
Width	111 mm
Weight	1.49 kg
Volume Energy Density	244 Wh/l
Weight Energy Density	143 Wh/kg

PACK DISCHARGE CURVES AT DIFFERENT VOLTAGE MODES (24V/12V)

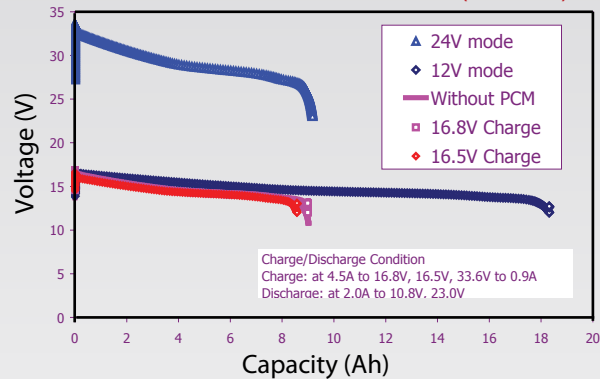

FOR MORE INFORMATION

Contact Paul Beach
 paulb@quallion.com
 818.833.2000

www.quallion.com



QUALLION
Powering Life.